



FIGURE 2

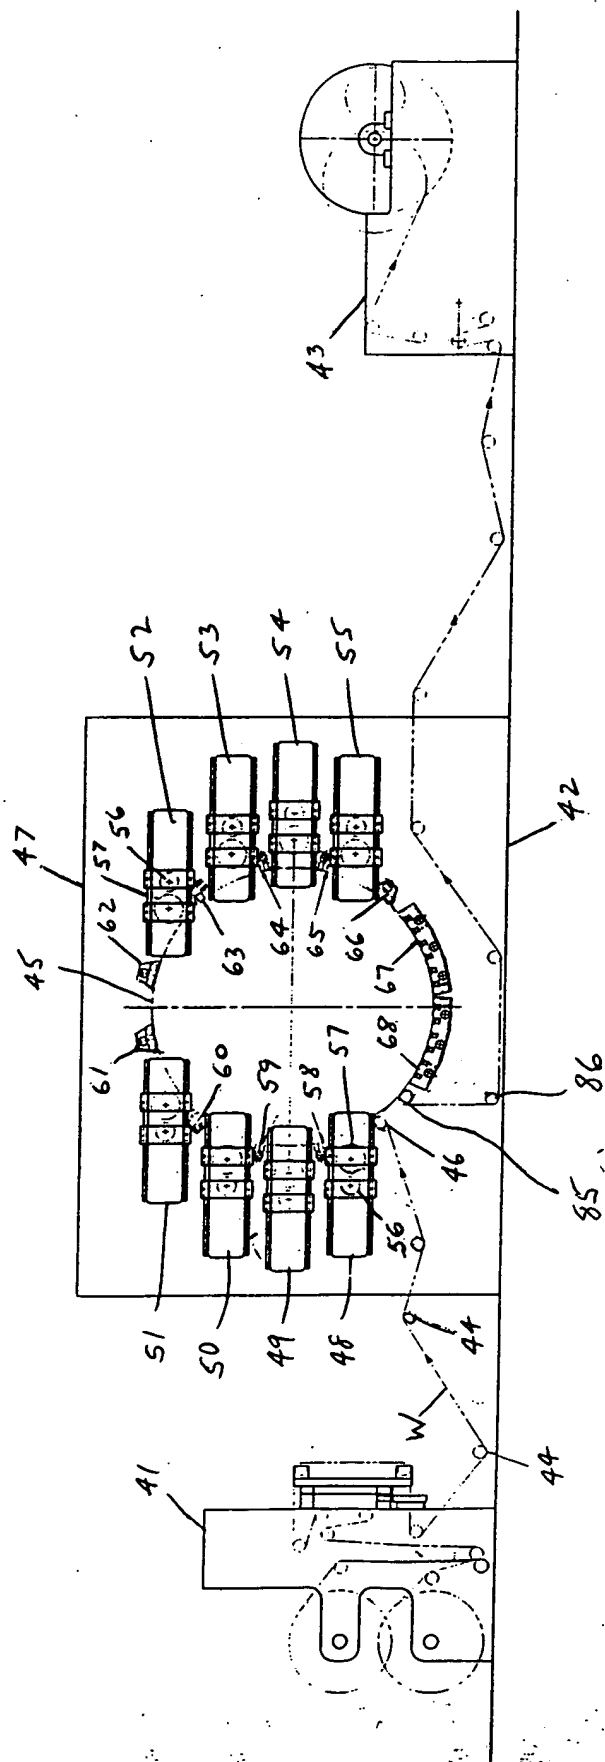


FIG. 3 is a perspective view of the device of FIG. 1, showing the device in a closed position. The device includes a main body 70, a handle 78, and a latch 77. The handle 78 is connected to the main body 70 by a hinge 80. The latch 77 is located on the main body 70 and is used to lock the device in a closed position. The device also includes a series of rectangular openings 71a, 71b, 72a, 72b, 73a, 73b, 74, and 75, which are arranged in a row along the length of the main body 70. These openings are used to receive and hold a series of rectangular components 76, 77, 78, 79, 80, 81, 82, and 83, which are shown in FIG. 1. The device is shown in a perspective view, with the handle 78 and latch 77 being the most prominent features.

FIG. 3

